

DUALSKY[®]
ADVANCED POWER SYSTEMS



DUALSKY CATALOG 2012

2012 双天产品目录

Air Side 空模部分



目录

CONTENT

- ① 全新Xmotor EA 系列无刷外转子马达 (P1-P8)
All new Xmotor EA brushless outrunners for airplane
- ② Xmotor DA 竞赛系列无刷外转子马达 (P9)
Xmotor DA competition series brushless outrunners
- ③ Xmotor DA 马达配件 (P10)
Accessories for Xmotor DA
- ④ 马达延长支架、马达轴 (P11-P12)
Xmotor extensions and shafts
- ⑤ Xmotor MA、RTR series (P13-P14)
Xmotor MA、RTR 系列马达
- ⑥ Xmotor PGB、ES、CH series (P15-P16)
Xmotor PGB、ES、CH 系列马达
- ⑦ Xmotor CA 系列无刷外转子马达 (P17-P20)
Xmotor CA series brushless outrunners
- ⑧ Accessories for Xmotors (P21-P22)
马达配件
- ⑨ EA 马达数据 (P23-24)
Xmotor EA Datasheet
- ⑩ G5 Xpower GT-S 系列锂聚合物动力电池组 (P25-P28)
5th Generation Xpower GT-S series
- ⑪ G5 Xpower HED 高能量密度轻型电池组 (P29-P30)
G5 Xpower HED series
- ⑫ Xpower EX 具备惊人5C快充能力 (P31-P32)
Xpower EX series
- ⑬ Xpower ES 系列、电池配件 (P33-P34)
Xpower ES Lipo packs、Accessories for packs
- ⑭ Xcontroller V2版 无刷变频速度控制器 (P35)
Xcontroller BA brushless & sensorless ESCs V2
- ⑮ Dualsky充电系统 (P36)
Multi-function charge systems
- ⑯ 电子配件 (P37-P40)
Electronics & Accessories
- ⑰ 无线电遥控模型飞机套材 (P41-P42)
RC Model Aircraft Kit





ALL NEW XMOTOR EA BRUSHLESS OUTRUNNERS FOR AIRPLANE


全新 Xmotor EA 系列无刷外转子马达

Features:

- Improved front cover, better heat dissipation.
- Rotor with more beautiful star design.
- Increased the intensity of the rotor and shell, reduce vibration, can withstand more loads.
- Adopt tile magnets with higher grade.
- Higher efficiency laminations.
- Reduce the air gap of the stator and rotor, increase efficiency.
- Thicker high temperature enameled wire, improved insulation and impact resistance.
- Compare EA with CA at same level, the power increased 10-20%, and efficiency increased 3-5%.
- More options for KV value, suitable for practical use.
- Add XM2838EA, XM4255EA which models CA do not have.
- Motor mounting holes and shaft diameter compatible with CA Series.
- Accessories compatible with the CA series (except for new models).
- 8mm propeller mount with the thinner threads, propeller not easy to loose.

特点:

- 改良前盖设计，散热更好。
- 转子采用更美观的星型设计。
- 增加了转子和机壳强度，减小振动，能承受更大负载。
- 换用更高规格瓦形磁铁。
- 采用高效率矽钢片。
- 减小定子和转子的气隙，提高效率。
- 采用更粗的高温漆包线，提高绝缘性和抗冲击性。
- 同级别EA比CA功率提升10-20%，效率提升3-5%。
- 更多的KV值选择，贴近应用。
- 增加了XM2838EA, XM4255EA这两个CA没有的型号。
- 电机安装孔和轴直径兼容CA系列。
- 配件与CA系列兼容（除了新增加型号）。
- 8mm桨座配件采用M8x1螺纹，螺旋桨不易松动。

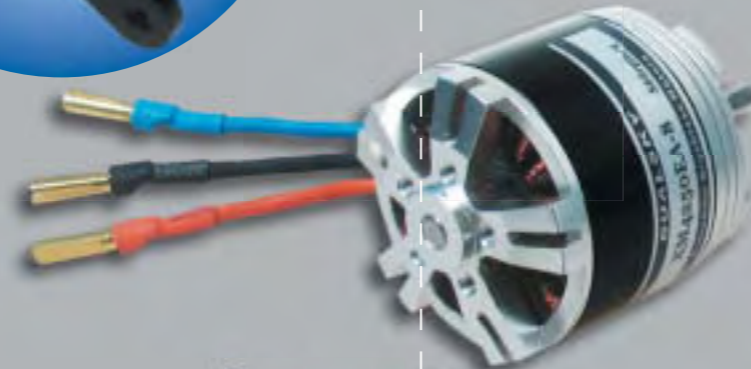

ALL NEW XMOTOR EA BRUSHLESS OUTRUNNERS FOR AIRPLANE

全新 Xmotor EA 系列无刷外转子马达

EA Series
BRUSHLESS OUTRUNNERS



DUALSKY.
X-MOTOR
BRUSHLESS OUTRUNNERS





ALL NEW XMOTOR EA BRUSHLESS OUTFUNNERS FOR AIRPLANE

全新 Xmotor EA 系列无刷外转子马达

Item NO.	Name/Description			
55654	XM2826EA-10	1630 RPM/V	44g	137W
55655	XM2826EA-12	1370 RPM/V	43g	167W
55656	XM2826EA-14	1170 RPM/V	43g	145W
55657	XM2826EA-16	1025 RPM/V	44g	138W



55670 ▲

◀ 55657

◀ 55662

Item NO.	Name/Description			
55658	XM2830EA-7	1540 RPM/V	58g	171W
55659	XM2830EA-8	1350 RPM/V	57g	220W
55660	XM2830EA-9	1210 RPM/V	57g	200W
55661	XM2830EA-10	1095 RPM/V	57g	179W
55662	XM2830EA-11	980 RPM/V	57g	175W



ALL NEW XMOTOR EA BRUSHLESS OUTFUNNERS FOR AIRPLANE

全新 Xmotor EA 系列无刷外转子马达

Item NO.	Name/Description			
55663	XM2834EA-6	1360 RPM/V	71g	285W
55664	XM2834EA-7	1160 RPM/V	70g	250W
55665	XM2834EA-8	1010 RPM/V	70g	229W
55666	XM2834EA-9	915 RPM/V	69g	203W



Item NO.	Name/Description			
55667	XM2838EA-5	1300 RPM/V	82g	301W
55668	XM2838EA-6	1090 RPM/V	83g	283W
55669	XM2838EA-7	935 RPM/V	83g	256W
55670	XM2838EA-8	810 RPM/V	83g	295W





ALL NEW XMOTOR EA BRUSHLESS OUTRUNNERS FOR AIRPLANE

全新 Xmotor EA 系列无刷外转子马达

Item NO.	Name/Description			
55671	XM3530EA-9	1355 RPM/V	73g	270W
55672	XM3530EA-10	1220 RPM/V	74g	260W
55673	XM3530EA-12	1020 RPM/V	74g	239W
55674	XM3530EA-13	930 RPM/V	72g	210W



Item NO.	Name/Description			
55675	XM3536EA-5	1380 RPM/V	106g	341W
55676	XM3536EA-6	1160 RPM/V	106g	415W
55677	XM3536EA-7	990 RPM/V	105g	377W
55678	XM3536EA-8	875 RPM/V	105g	320W



ALL NEW XMOTOR EA BRUSHLESS OUTRUNNERS FOR AIRPLANE


全新 Xmotor EA 系列无刷外转子马达

Item NO.	Name/Description			
55679	XM3542EA-4	1180 RPM/V	140g	581W
55680	XM3542EA-5	950 RPM/V	140g	502W
55681	XM3542EA-6	790 RPM/V	140g	548W



Item NO.	Name/Description			
55682	XM3548EA-3.5	1040 RPM/V	172g	660W
55683	XM3548EA-4	915 RPM/V	173g	604W
55684	XM3548EA-5	740 RPM/V	170g	671W





ALL NEW XMOTOR EA BRUSHLESS OUTRUNNERS FOR AIRPLANE

全新 Xmotor EA 系列无刷外转子马达

Item NO.	Name/Description			
55685	XM4250EA-4	1100 RPM/V	211g	907W
55686	XM4250EA-5	880 RPM/V	210g	1001W
55687	XM4250EA-6	745 RPM/V	210g	905W
55688	XM4250EA-8	560 RPM/V	205g	877W

▼ 55692



▲ 55686

Item NO.	Name/Description			
55689	XM4255EA-4.5	790 RPM/V	252g	1128W
55690	XM4255EA-5	710 RPM/V	250g	1060W
55691	XM4255EA-6	590 RPM/V	251g	1142W
55692	XM4255EA-7	505 RPM/V	250g	1187W
55693	XM5050EA-6	710 RPM/V	293g	1240W
55694	XM5050EA-7	610 RPM/V	285g	1291W
55695	XM5050EA-8	535 RPM/V	284g	1354W
55696	XM5050EA-9	480 RPM/V	281g	1242W



ALL NEW XMOTOR EA BRUSHLESS OUTRUNNERS FOR AIRPLANE

全新 Xmotor EA 系列无刷外转子马达

Item NO.	Name/Description			
55697	XM5060EA-6	470 RPM/V	393g	1849W
55698	XM5060EA-7	405 RPM/V	383g	1641W
55699	XM5060EA-8	355 RPM/V	382g	1508W
55700	XM5060EA-9	315 RPM/V	378g	1690W



▲ 55698

▲ 55705

Item NO.	Name/Description			
55701	XM6350EA-9	370 RPM/V	469g	2074W
55702	XM6350EA-12	280 RPM/V	462g	2102W
55703	XM6350EA-15	224 RPM/V	453g	2040W
55704	XM6360EA-10	218 RPM/V	627g	3081W
55705	XM6360EA-11	200 RPM/V	626g	2875W
55706	XM6360EA-12	184 RPM/V	617g	3022W





XMOTOR DA COMPETITION SERIES BRUSHLESS OUTRUNNERS

Xmotor DA 竞赛系列无刷外转子马达

Item NO.	Name/Description	Weight
57635	XM6355DA-10-Competition, 278 RPM/V	563g
57636	XM6355DA-11-Competition, 240 RPM/V	566g
57606	XM6355DA-12-Competition, 222 RPM/V	566g
57637	XM6360DA-9-Competition, 242 RPM/V	655g
57608	XM6360DA-10-Competition, 218 RPM/V	655g
57630	XM6360DA-11-Competition, 199 RPM/V	650g
57634	XM6360DA-12-Competition, 182 RPM/V	642g



▲ 57635

▲ 57636



▲ 57606



▲ 57637

▲ 57608

▲ 57630

▲ 57634

ACCESSORIES FOR XMOTOR DA

Xmotor DA 马达配件

Item NO.	Name/Description
57732	MS6355-DA, main shaft for XM6355DA
57733	MS6360-DA, main shaft for XM6360DA
57734	BB63-DA, ball bearing replacement for DA motors
57609	XM6355DA Front Mount(For E-conversion)
57610	XM6360DA Front Mount(For E-conversion)



57732



57733



57734



57609



57610

Features:

- New designed long shaft without buckle, specially for F3A aircraft.
- Imported large size bearings.
- The back cover without jbscrew, combined with shaft by hot pressing. More stable, more balanced.
- Rotor dynamic balancing. Precision assembled case, control the swing, while using dynamic balancer to detect and compensate.
- Improved air-gap and improved efficiency.
- Tile-shaped magnets. Adopt the highest grade aluminum iron boron magnets.
- 0.2mm lamination.
- 220 centigrade degree high temperature wire.
- Thicker enameled wire. 4-8 strands in parallel, improved insulation and impact resistance.
- KV value optimized. Accurately calculate wire diameter, improve magnetic efficiency.
- Weight decreased. XM6355DA weighs about 560g.
- There is bearing bracket in the back of motor, to further reduce vibration.
- Supply dedicated motor mount (sold separately) to fix in the front of firewall.
- New designed appearance with Dualsky symbolic star.

特点:

- 全新长主轴设计，轴上无卡扣，特别针对F3A飞机。
- 大规格进口轴承。
- 无顶丝后盖，与主轴热压结合。更稳固，更平衡。
- 转子动平衡。精密装配机壳，控制摆动量，同时使用动平衡机检测和补偿。
- 改良气隙，提高效率。
- 瓦形磁铁。采用最高等级铝铁硼磁铁。
- 0.20mm矽钢片。
- 220摄氏度高温线。
- 较粗漆包线。4-8股并联，提高绝缘性和抗冲击型。
- 优化KV值。精确计算线径，提高磁效率。
- 优化重量，6355DA重量560g左右。
- 马达后部设有轴承托架，以便进一步减小震动。
- 提供专用马达安装架（另购），以便安装在防火墙前部。
- 全新外观设计，带Dualsky标志性星型。

MOTOR EXTENSIONS

马达延长支架(通用型)

Item NO.	Name/Description
50594	ME3-10, L=2.5-10mm Adjustable, for XM28 to XM42
50595	ME3-20, L=12.5-20mm Adjustable, for XM28 to XM42
50596	ME3-30, L=22.5-30mm Adjustable, for XM28 to XM42
50597	ME3-40, L=32.5-40mm Adjustable, for XM28 to XM42
50598	ME3-50, L=42.5-50mm Adjustable, for XM28 to XM42
50599	ME4-10, L=2.5-10mm Adjustable, for XM42 and bigger
50600	ME4-20, L=12.5-20mm Adjustable, for XM42 and bigger
50601	ME4-30, L=22.5-30mm Adjustable, for XM42 and bigger
50602	ME4-40, L=32.5-40mm Adjustable, for XM42 and bigger
50603	ME4-50, L=42.5-50mm Adjustable, for XM42 and bigger
50604	ME4-60, L=52.5-60mm Adjustable, for XM42 and bigger
50605	ME4-70, L=62.5-70mm Adjustable, for XM42 and bigger



XMOTOR SHAFTS FOR CA, CH & EA SERIES

Xmotor 马达轴, 用于CA,CH和EA系列



Item NO.	Name/Description
55309	MS2812, for XM2812CA motors
55158	MS2822, can be used for XM2822CA motors
55159	MS2826, can be used for XM2826CA/EA motors
55160	MS2830, can be used for XM2830CA/CH/EA motors
55187	MS2822H, hollow shaft, M3, 175mm, m2.0mm
55199	MS2826H, hollow shaft, M3, 175mm, m2.0mm
55188	MS2830H, hollow shaft, M3, 175mm, m2.0mm
55340	MS2834, can be used for XM2834CA/CH/EA motors
55723	MS2838, shaft replacement for XM2838EA
55161	MS3530, can be used for XM3530CA/EA series motors
55162	MS3536, can be used for XM3536CA/EA series motors
55163	MS3542, can be used for XM3542CA/EA series motors
55164	MS3548, can be used for XM3548CA/EA series motors
55165	MS4240, can be used for XM4240CA series motors
55166	MS4250, can be used for XM4250CA/EA series motors
55724	MS4255, shaft replacement for XM4255EA
55167	MS4260, can be used for XM4260CA series motors
55168	MS5050, can be used for XM5050CA/EA series motors
55169	MS5060, can be used for XM5060CA/EA series motors
55170	MS6350, can be used for XM6350CA/EA series motors
55171	MS6360, can be used for XM6360CA/EA series motors



XMOTOR MICRO SERIES BRUSHLESS OUTRUNNERS


Xmotor Micro 系列超小型无刷外转子马达

Item NO.	Name/Description
55526	XM1812MA-42, 2330 RPM/V, 7.0g For 60-80g Micro Models
55527	XM2212MA-25, 2160 RPM/V, 10.5g
55528	XM2215MA-17, 1620 RPM/V, 16.5g

▼ 55528



▲ 55526

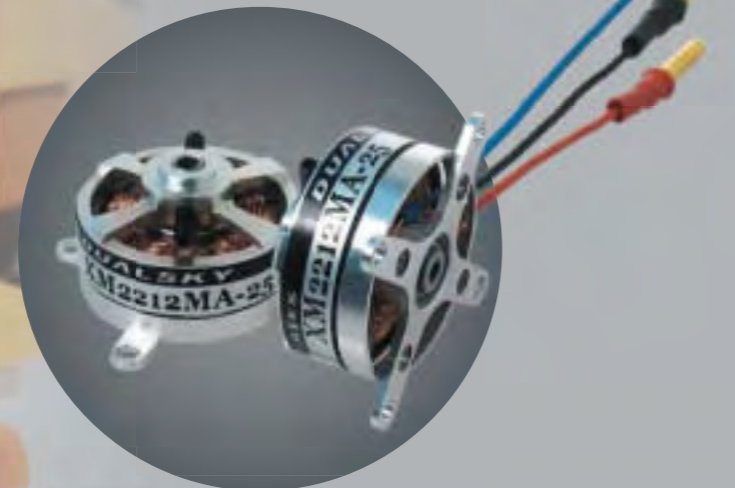

▲ 55527

XMOTOR RTR SERIES BRUSHLESS OUTRUNNERS(EASY ENTRY, ESC INSIDE)

Xmotor RTR 系列内置电调无刷外转子马达


Item NO.	Name/Description	weight
56302	XM2812RTR-27, KV=1800RPM, Combine with ESC	25.7g
56303	XM2812RTR-33, KV=1450RPM, Combine with ESC	25.7g
56748	XM1812RTR-42, 2330 RPM/V, For 60-80g Micro Models	11g
56749	XM2212RTR -25, 2160 RPM/V	15g
56750	XM2215RTR -17, 1620 RPM/V	20g



▲ 56302




◀ 56303

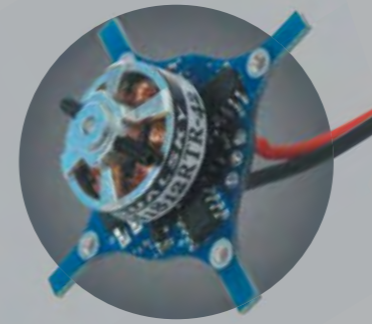


▲ 56748



▲ 56749

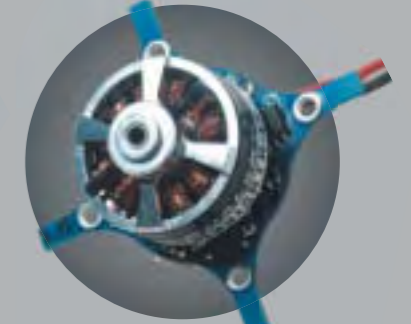

▲ 56750

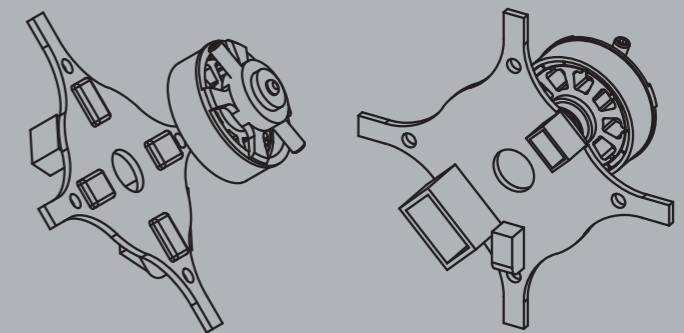

Patent pending 专利申请中



XMOTOR PGB SERIES FOR GLIDERS(WITH PLANETARY GEARBOX)

Xmotor PGB 行星减速无刷动力组

Item NO.	Name/Description	weight
55459	XM2830PGB-9, 1045 RPM/V	82g
55460	XM2834PGB-8, 980 RPM/V	92g
50407	PGB28-3.1, precision planetary gearbox(1:3.1)	



▲ 50407



▲ 55459




▲ 55460


XMOTOR ES SERIES BRUSHLESS OUTRUNNERS(SUPER PERFORMANCE/VALUE RATE)

Xmotor ES 系列高性价比无刷外转子马达(超值)

Item NO.	Name/Description	weight
52316	XM300ES, 1670 RPM/V	35g
52317	XM400ES, 1180 RPM/V	50g
52318	XM450ES, 1050 RPM/V	65g

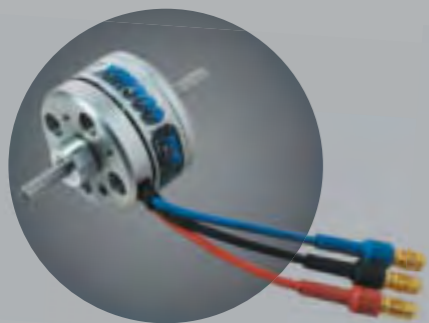

▲ 52316

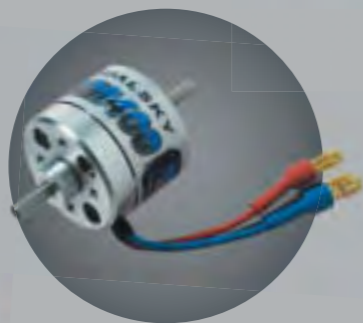

▲ 52317



▲ 52318

XMOTOR CH SERIES BRUSHLESS OUTRUNNERS FOR HELICOPTER

Xmotor CH 系列直升机用无刷外转子马达

Item NO.	Name/Description	weight
55299	XM2830CH-9, KV=3600RPM, Used for 400-450 heli	56g
55300	XM2830CH-10, KV=3300RPM, Used for 400-450 heli	56g
55297	XM2834CH-7, KV=3550RPM, but more power	67g
55298	XM2834CH-8, KV=3150RPM, Used for 400-450 heli	69g



▲ 55299



▲ 55300



▲ 55297




▲ 55298



XMOTOR CA SERIES BRUSHLESS OUTFRINNERS

Xmotor CA 系列无刷外转子马达

Item NO.	Name/Description	weight
55275	XM2812CA-27, 1780 RPM/V	19g
55276	XM2812CA-33, 1470 RPM/V	19g
55405	XM2815CA-20, 1800 RPM/V	22g
55406	XM2815CA-24, 1450 RPM/V	22g
55322	XM2822CA-20, 1800 RPM/V	30g
55115	XM2822CA-24, 1450 RPM/V	30g
55422	XM2826CA-10, 1770 RPM/V	44g
55116	XM2826CA-12, 1450 RPM/V	44g
55117	XM2826CA-15, 1200 RPM/V	44g
55118	XM2826CA-18, 980 RPM/V	44g
55119	XM2830CA-8, 1480 RPM/V	55g
55120	XM2830CA-10, 1180 RPM/V	55g
55121	XM2830CA-12, 980 RPM/V	55g
55323	XM2830CA-14, 830 RPM/V	55g
55291	XM2834CA-6, 1460 RPM/V	70g
55292	XM2834CA-7, 1250 RPM/V	70g
55293	XM2834CA-9, 980 RPM/V	70g
55294	XM2834CA-10, 870 RPM/V	70g

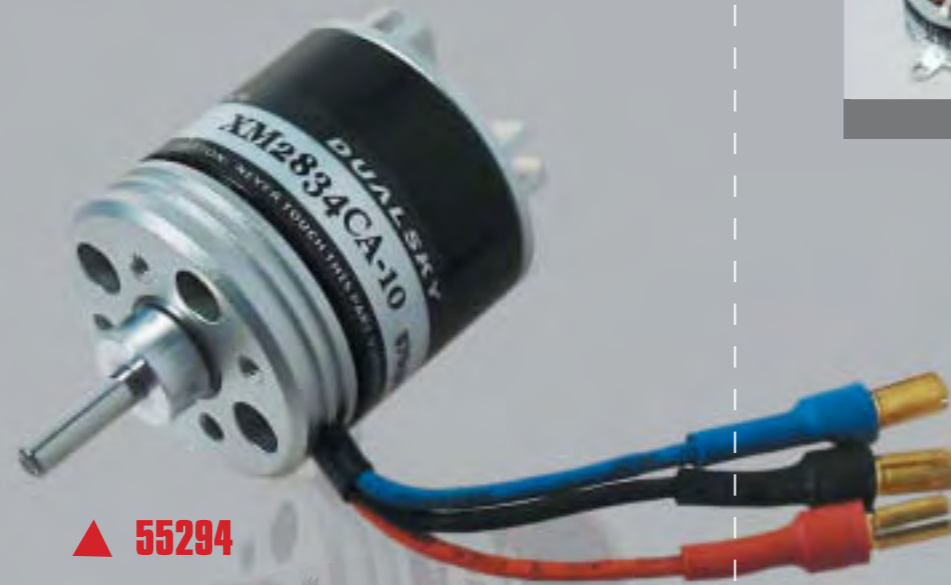

▲ 55294




▲ 55117



▲ 55275



▲ 55276



55405



55406



55322



55115



55422



55116



55118



55119



55120



55121



55323



55291



55292




55293



XMOTOR CA SERIES BRUSHLESS OUTFUNNERS

Xmotor CA 系列无刷外转子马达

Item NO.	Name/Description	weight
55122	XM3530CA-10, 1430 RPM/V	74g
55123	XM3530CA-12, 1200 RPM/V	74g
55124	XM3530CA-14, 1000 RPM/V	74g
55324	XM3530CA-16, 920 RPM/V	74g
55125	XM3536CA-6, 1330 RPM/V	103g
55325	XM3536CA-7, 1200 RPM/V	103g
55126	XM3536CA-8, 990 RPM/V	103g
55127	XM3536CA-9, 890 RPM/V	103g
55128	XM3542CA-5, 1120 RPM/V	137g
55129	XM3542CA-6, 940 RPM/V	137g
55130	XM3542CA-7, 800 RPM/V	137g
55131	XM3548CA-4, 1080 RPM/V	165g
55132	XM3548CA-5, 850 RPM/V	165g
55133	XM3548CA-6, 720 RPM/V	165g
55134	XM4240CA-10, 1020 RPM/V	127g
55135	XM4240CA-12, 850 RPM/V	127g
55136	XM4240CA-14, 730 RPM/V	127g
55137	XM4250CA-5, 1020 RPM/V	200g
55138	XM4250CA-6, 840 RPM/V	200g
55139	XM4250CA-7, 720 RPM/V	200g
55326	XM4250CA-10, 510 RPM/V	200g

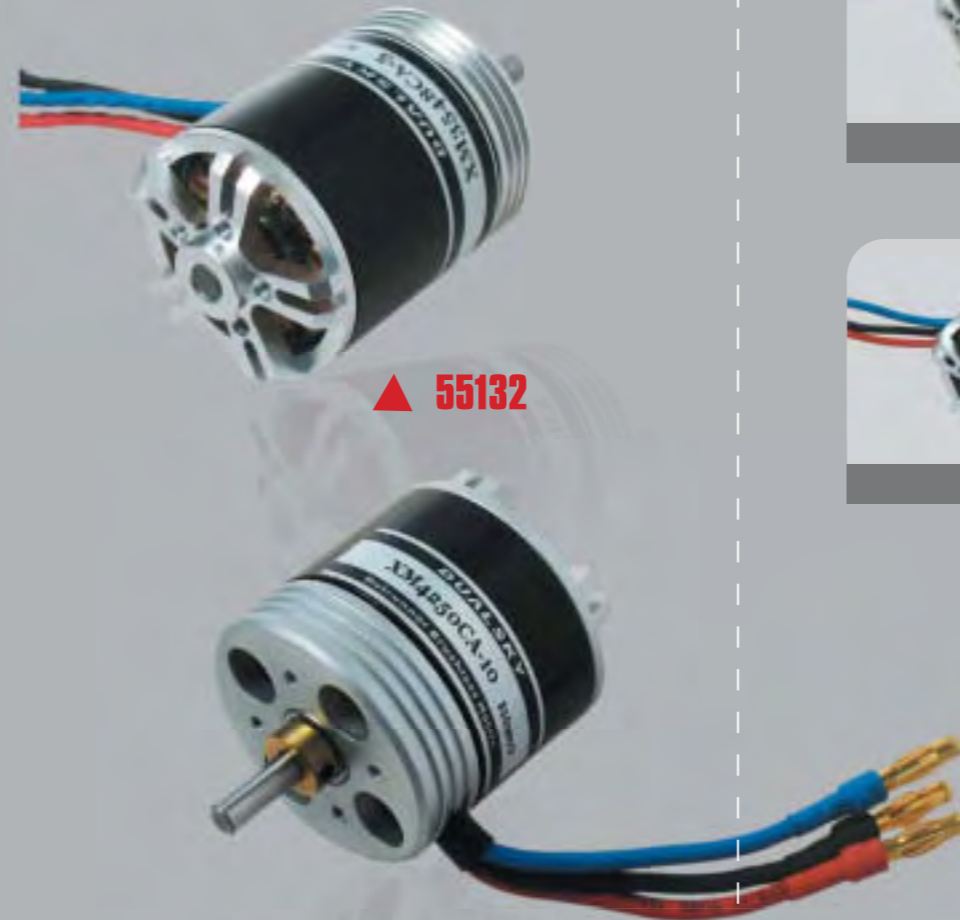

▲ 55132

▲ 55326



▲ 55122

▲ 55123

▲ 55124



55324

55125

55325

55126

55127

55128

55129

55130

55131

55133

55134

55135

55136

55137

55138

55139

MOTOR MOUNTS FOR CA, EA & ES SERIES

马达安装座，用于 CA, EA 和 ES 系列



Item NO.	Name/Description
50172	MM28, can be used for XM28CA/EA & ES motors
50173	MM35, can be used for XM35CA/EA series motor
50174	MM42, can be used for XM42CA/EA series motor
50175	MM50, can be used for XM50CA/EA series motor
50176	MM63, can be used for XM63CA/EA series motor

PROPELLER MOUNTS (SHAFT SIDE) FOR CA, EA & ES SERIES


螺旋桨安转座（轴上安装），适用 CA, EA 和 ES 系列



Item NO.	Name/Description
50177	PS32, Prop saver for 3.175MM shafts
50339	PM32S, prop adapter with spinner
50178	PM32, can be used for XM28 series motors
50179	PM40, used for XM3530, XM3536 series motors
50180	PM50, for XM3542, XM3548, XM4240, XM4250 motors
50181	PM60, for XM4260, XM4255EA, XM5050, XM5060
50182	PM80, for XM60CA/EA motors

PROPELLER MOUNTS (ROTOR SIDE) FOR CA SERIES

螺旋桨安装座（转子安装），适用 CA 系列

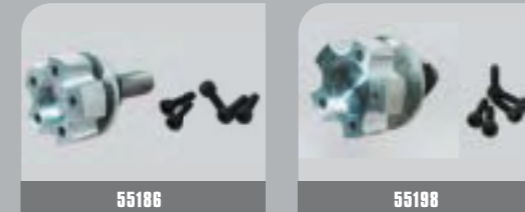

Item NO.	Name/Description
55312	PS28B, prop saver for XM28s' rotor
55183	PM28B, can be used for XM28 series motor
55184	PM35B, can be used for XM35 series motor
55185	PM42B, can be used for XM42 series motor
55186	PM50B, can be used for XM50 series motor
55198	PM63B, can be used for XM63 series motor

FAN SETS FOR BETTER COOLING FOR CA&CH SERIES

马达散热风扇档板，适用 CA 和 CH 系列



Item NO.	Name/Description
55193	FAN28, can be used for XM28CA/CH series motors
55194	FAN35, can be used for XM35CA series motors
55195	FAN42, can be used for XM42CA series motors
55196	FAN50, can be used for XM50CA series motors
55197	FAN63, can be used for XM63CA series motors

BALL BEARING FOR REPLACEMENT

轴承更换套装




Item NO.	Name/Description
55212	BB28, For XM28CA/EA/CH, 2pcs/set
55213	BB35S, for XM3530CA/EA, XM3536CA/EA, 2pcs/set
55214	BB35L, for XM3542CA/EA, XM3548CA/EA, 3pcs/set
55215	BB42S, for XM4240CA, XM4250CA/EA, 2pcs/set
55216	BB42L, for XM4260CA, XM4255EA, 3pcs/set
55217	BB50, for XM50CA/EA, 3pcs/set
55218	BB63, for XM63CA/EA, 3pcs/set



motor EA datasheet

航模 EA马达数据

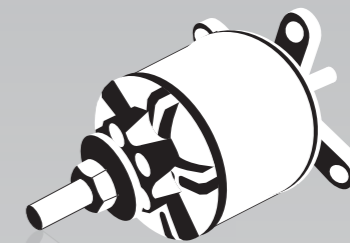

NO.	Description	RPM/V (KV)	Alias(Stator diameter, Magnet length)	Weight(g)	Diameter(mm)	Length(mm)	Diameter of Shaft(mm)	Mounting holes pitch(mm)	Slots, Poles	Idle Current(Io) @10V(A)	Resistance(Ri)(mOhm)	Cruising power(W)[8 mins]	Bursts current(A-)[15s]	Peak power(W)[15s]	Recommended ESC	Setup 1(No. of Cell, Prop.)	Setup 2(No. of Cell, Prop.)	Max. weight of sport models(kg)	Max. weight of 3D models(kg)	Memo
1	XM2826EA-10	1630	2208	43.9	27.5	23	3.175	16/19	12,14	1.4	57	75	18.5	137	XC1812BA	2S, 8x4.3SF	N/A	0.38	0.25	
2	XM2826EA-12	1370	2208	43.1	27.5	23	3.175	16/19	12,14	1.0	77	92	15.1	167	XC1812BA	2S, 10x5	3S, 8x5	0.46	0.31	300 class
3	XM2826EA-14	1170	2208	43.0	27.5	23	3.175	16/19	12,14	0.8	108	80	13.1	145	XC1210BA	3S, 9x5	N/A	0.40	0.27	
4	XM2826EA-16	1025	2208	43.7	27.5	23	3.175	16/19	12,14	0.6	125	76	12.4	138	XC1210BA	3S, 10x5	N/A	0.38	0.25	
5	XM2830EA-7	1540	2212	58	27.5	28	3.175	16/19	12,14	1.9	38	94	23.1	171	XC2512BA	2S, 8x5	N/A	0.47	0.31	
6	XM2830EA-8	1350	2212	57	27.5	28	3.175	16/19	12,14	1.6	45	121	19.8	220	XC2512BA	2S, 11x4.7	3S, 9x5	0.61	0.40	
7	XM2830EA-9	1210	2212	57	27.5	28	3.175	16/19	12,14	1.3	57	110	18.0	200	XC1812BA	3S, 9x5	N/A	0.55	0.37	400 class
8	XM2830EA-10	1095	2212	57	27.5	28	3.175	16/19	12,14	1.1	74	99	16.2	179	XC1812BA	3S, 10x5	N/A	0.49	0.33	
9	XM2830EA-11	980	2212	57	27.5	28	3.175	16/19	12,14	0.9	80	96	15.7	175	XC1812BA	3S, 10x6	N/A	0.48	0.32	
10	XM2834EA-6	1360	2216	71	27.5	32	3.175	16/19	12,14	2.1	32	157	25.7	285	XC2512BA	2S, 12x6	3S, 9x6	0.78	0.52	
11	XM2834EA-7	1160	2216	70	27.5	32	3.175	16/19	12,14	1.6	44	138	22.6	250	XC2512BA	2S, 12x7	3S, 10x5	0.69	0.46	
12	XM2834EA-8	1010	2216	70	27.5	32	3.175	16/19	12,14	1.3	55	126	20.6	229	XC2512BA	3S, 11x5	N/A	0.63	0.42	450 class
13	XM2834EA-9	915	2216	69	27.5	32	3.175	16/19	12,14	1.1	73	112	18.3	203	XC1812BA	3S, 12x5	N/A	0.56	0.37	
14	XM2838EA-5	1300	2220	82	27.5	36	3.175	16/19	12,14	2.3	35	166	27.1	301	XC3012BA	2S, 13x6	3S, 10x6	0.83	0.55	
15	XM2838EA-6	1090	2220	83	27.5	36	3.175	16/19	12,14	1.8	42	155	25.5	283	XC3012BA	3S, 11x6	N/A	0.78	0.52	480+ class
16	XM2838EA-7	935	2220	83	27.5	36	3.175	16/19	12,14	1.3	54	141	23.0	256	XC2512BA	3S, 12x6	N/A	0.70	0.47	More power
17	XM2838EA-8	810	2220	83	27.5	36	3.175	16/19	12,14	1.1	67	162	20.0	295	XC2512BA	3S, 13x6	4S, 10x6	0.81	0.54	
18	XM3530EA-9	1355	2808	73	34.5	27	4.0	19/25	12,14	2.1	39	149	24.3	270	XC2512BA	2S, 12x6	3S, 10x5	0.74	0.50	
19	XM3530EA-10	1220	2808	74	34.5	27	4.0	19/25	12,14	1.9	44	143	23.4	260	XC2513BA	2S, 13x6	3S, 10x5	0.71	0.48	480 class
20	XM3530EA-12	1020	2808	74	34.5	28	4.0	19/25	12,14	1.4	54	131	21.5	239	XC2514BA	3S, 11x5	N/A	0.66	0.44	High torque
21	XM3530EA-13	930	2808	72	34.5	27	4.0	19/25	12,14	1.2	71	116	18.9	210	XC2515BA	3S, 12x6	N/A	0.58	0.39	
22	XM3536EA-5	1380	2814	106	34.5	34	4.0	19/25	12,14	3.8	17	187	46	341	XC4018BA	2S, 12x7	N/A	0.94	0.62	
23	XM3536EA-6	1160	2814	106	34.5	35	4.0	19/25	12,14	2.8	23	228	37	415	XC4018BA	2S, 14x6	3S, 10x7	1.14	0.76	
24	XM3536EA-7	990	2814	105	34.5	34	4.0	19/25	12,14	2.2	29	207	34	377	XC3012BA	3S, 12x6	N/A	1.04	0.69	.10-.15 2-stroke
25	XM3536EA-8	875	2814	105	34.5	34	4.0	19/25	12,14	1.8	44	176	29	320	XC3012BA	3S, 12x7	N/A	0.88	0.59	
26	XM3542EA-4	1180	2820	140	34.5	40	5.0	19/25	12,14	4.1	15	320	52	581	XC6018BA	3S, 11x6	N/A	1.6	1.07	
27	XM3542EA-5	950	2820	140	34.5	40	5.0	19/25	12,14	2.7	22	276	45	502	XC4018BA	3S, 13x6	N/A	1.4	0.92	Up to .21 2st
28	XM3542EA-6	790	2820	140	34.5	40	5.0	19/25	12,14	2.1	31	302	37	548	XC4018BA	3S, 14x6	4S, 11x7	1.5	1.01	
29	XM3548EA-3.5	1040	2826	172	34.5	46	5.0	19/25	12,14	4.2	15	363	59	660	XC6018BA	3S, 12x6	N/A	1.8	1.2	
30	XM3548EA-4	915	2826	173	34.5	46	5.0	19/25	12,14	3.5	19	332	54	604	XC6018BA	3S, 13x7	N/A	1.7	1.1	.25-.32 2-stroke
31	XM3548EA-5	740	2826	170	34.5	46	5.0	19/25	12,14	2.5	25	369	45	671	XC4018BA	3S, 14x7	4S, 13x6.5	1.8	1.2	
32	XM4250EA-4	1100	3520	211	42	44	5.0	25/25	12,14	6.7	9	499	82	907	XC8018BA	3S, 13x6	N/A	2.5	1.7	
33	XM4250EA-5	880	3520	210	42	44	5.0	25/25	12,14	4.6	12	551	68	1001	XC8018BA	3S, 14x6	4S, 13x4	2.8	1.8	.32-.40 2-stroke
34	XM4250EA-6	745	3520	210	42	44	5.0	25/25	12,14	3.8	16	498	61	905	XC6018BA	4S, 13x6	N/A	2.5	1.7	Up to .56 4st
35	XM4250EA-8	560	3520	205	42	44	5.0	25/25	12,14	2.3	26	482	47	877	XC6018BA	4S, 15x6	5S, 13x7	2.4	1.6	
36	XM4255EA-4.5	790	3525	252	42	49	6.0	25/25	12,14	4.7	12	621	76	1128	XC8018BA	3S, 15x6	4S, 14x4	3.1	2.1	
37	XM4255EA-5	710	3525	250	42	49	6.0	25/25	12,14	4.0	14	583	72	1060	XC8018BA	3S, 15x8	4S, 14x6	2.9	1.9	.46-.55 2-stroke
38	XM4255EA-6	590	3525	251	42	49	6.0	25/25	12,14	2.9	18	628	62	1142	XC6018BA	4S, 15x6	5S, 14x6	3.1	2.1	Up to .72 4st
39	XM4255EA-7	505	3525	250	42	49	6.0	25/25	12,14	2.3	23	653	53	1187	XC6018BA	5S, 14x7	6S, 14x5(52A)	3.3	2.2	
40	XM5050EA-6	710	4120	293	49	48	6.0	30/30	12,14	3.3	12	682	84	1240	XC8018BA	4S, 15x6	N/A	3.4	2.3	
41	XM5050EA-7	610	4120	285	49	48	6.0	30/30	12,14	2.4	16	710	70	1291	XC8018BA	4S, 15x8	5S, 14x6	3.6	2.4	.55-.65 2-stroke
42	XM5050EA-8	535	4120	284	49	48	6.0	30/30	12,14	2.0	20	745	61	1354	XC6018BA	5S, 15x6	6S, 14x5	3.7	2.5	Up to .82 4st
43	XM5050EA-9	480	4120	281	49	48	6.0	30/30	12,14	1.6	25	683	56	1242	XC6018BA	5S, 15x8	6S, 14x7	3.4	2.3	
44	XM5060EA-6	470	4130	393	49	58	6.0	30/30	12,14	2.4	15	1017	83	1849	XC8018BA	5S, 15x10	6S, 15x8(75A)	5.1	3.4	
45	XM5060EA-7	405	4130	383	49	58	6.0	30/30	12,14	1.8	20	902	74	1641	XC8018BA	5S, 16x10(71A)	6S, 16x8	4.5	3.0	.75-.90 2-stroke
46	XM5060EA-8	355	4130	382	49	58	6.0	30/30	12,14	1.5	25	829	68	1508	XC6018BA	6S, 16x10	N/A	4.1	2.8	Up to .110 4st
47	XM5060EA-9	315	4130	378	49	58	6.0	30/30	12,14	1.2	32	929	57	1690	XC9036HV	8S, 15x8	N/A	4.6	3.1	
48	XM6350EA-9	370	5320	469	62.4	49	8.0	44/44	12,14	2.4	15	1141	93	2074	XC10018CA	6S, 20x10	N/A	5.7	3.8	.95-.120 2-stroke
49	XM6350EA-12	280	5320	462	62.4	49	8.0	44/44	12,14	1.5	25	1156	71	2102	XC9036HV	8S, 19x10	N/A	5.8	3.9	Up to .140 4st
50	XM6350EA-15	224	5320	453	62.4	49	8.0	44/44	12,14	1.1	41	1122	55	2040	XC9036HV	10S, 18x10	N/A	5.6	3.7	
51	XM6360EA-10	218	5330	627	62.4	59	8.0	44/44	12,14	1.6	23	1694	83	3081	XC9036HV	10S, 20x12	N/A	8.5	5.6	.140-.160 2-stroke
52	XM6360EA-11	200	5330	626	62.4	59	8.0	44/44	12,14	1.3	28	1581	78	2875	XC9036HV	10S, 21x13	N/A	7.9	5.3	Up to .200 4st
53	XM6360EA-12	184	5330	617	62.4	59	8.0	44/44	12,14	1.1	34	1662	68	3022	XC9036HV	10S, 21x15	12S, 22x10	8.3	5.5	

DUALSKY
ADVANCED POWER SYSTEMS



5TH GENERATION XPOWER GT-S SERIES. 45C DISCHARGING AND 6C CHARGING

G5 Xpower GT-S 系列锂聚合物动力电池组 - 极限性能，高端力作

Features:

- G5-5th Generation battery technology.
- Nano Coat Technology - Advanced Nano-electrode.
- Ultra-Low-IR, 45C discharge and 6C charge.
- 45% power increase.
- To ensure 300 + times cycle without attenuation.
- All packs include a XH balancing connector and a DC3.
- Heavy duty plug or JST connector.

特点:

- 世界最强的45C连续放电能力，3D飞行首选。
- 具备6C的高速充电性能。
- Dualsky第五代Xpower电池技术。
- 45%动力提升（较以往Dualsky电池组）。
- 300+次无衰减循环保证。
- 叠片结构，采用纳米涂层技术，超低内阻。
- 日本进口关键材料。
- 业界最严格的单体容量，电压，内阻甚至放电曲线。（竞赛级）配对工序。
- 预装双天DC3 Heavy Duty插头，便于使用。
- 按照严苛的外销品质生产。



34222 ▲

◀ 34532

▲ 34535




Item NO.	Name/Description	Weight
34222	XP03002GT-S, 300mAh 2S1P 7.4v, 45C/6C	23g
34223	XP03003GT-S, 300mAh 3S1P 11.1v, 45C/6C	34g
34529	XP05502GT-S, 550mAh 2S1P 7.4v, 45C/6C	31g
34530	XP05503GT-S, 550mAh 3S1P 11.1v, 45C/6C	45g
34583	XP08002GT-S, 800mAh 2S1P 7.4v, 45C/6C	53g
34584	XP08003GT-S, 800mAh 3S1P 11.1v, 45C/6C	78g
34585	XP12002GT-S, 1200mAh 2S1P 7.4v, 45C/6C	76g
34586	XP12003GT-S, 1200mAh 3S1P 11.1v, 45C/6C	115g
34587	XP12004GT-S, 1200mAh 4S1P 14.8v, 45C/6C	141.5g
34531	XP17502GT-S, 1750mAh 2S1P 7.4v, 45C/6C	102.0g
34532	XP17503GT-S, 1750mAh 3S1P 11.1v, 45C/6C	151.5g
34533	XP17504GT-S, 1750mAh 4S1P 14.8v, 45C/6C	197.0g
34534	XP22502GT-S, 2250mAh 2S1P 7.4v, 45C/6C	132.0g
34535	XP22503GT-S, 2250mAh 3S1P 11.1v, 45C/6C	193.0g
34536	XP22504GT-S, 2250mAh 4S1P 14.8v, 45C/6C	249.5g
34537	XP22505GT-S, 2250mAh 5S1P 18.5v, 45C/6C	308.5g
34538	XP22506GT-S, 2250mAh 6S1P 22.2v, 45C/6C	362.5g
34539	XP26502GT-S, 2650mAh 2S1P 7.4v, 45C/6C	150.0g
34540	XP26503GT-S, 2650mAh 3S1P 11.1v, 45C/6C	218.5g
34541	XP26504GT-S, 2650mAh 4S1P 14.8v, 45C/6C	286.0g
34542	XP26505GT-S, 2650mAh 5S1P 18.5v, 45C/6C	357.0g
34543	XP26506GT-S, 2650mAh 6S1P 22.2v, 45C/6C	418.0g
34544	XP32502GT-S, 3250mAh 2S1P 7.4v, 45C/6C	195.0g
34545	XP32503GT-S, 3250mAh 3S1P 11.1v, 45C/6C	287.0g



5TH GENERATION XPOWER GT-S SERIES. 45C DISCHARGING AND 6C CHARGING

G5 Xpower GT-S 系列锂聚合物动力电池组 - 极限性能，高端力作

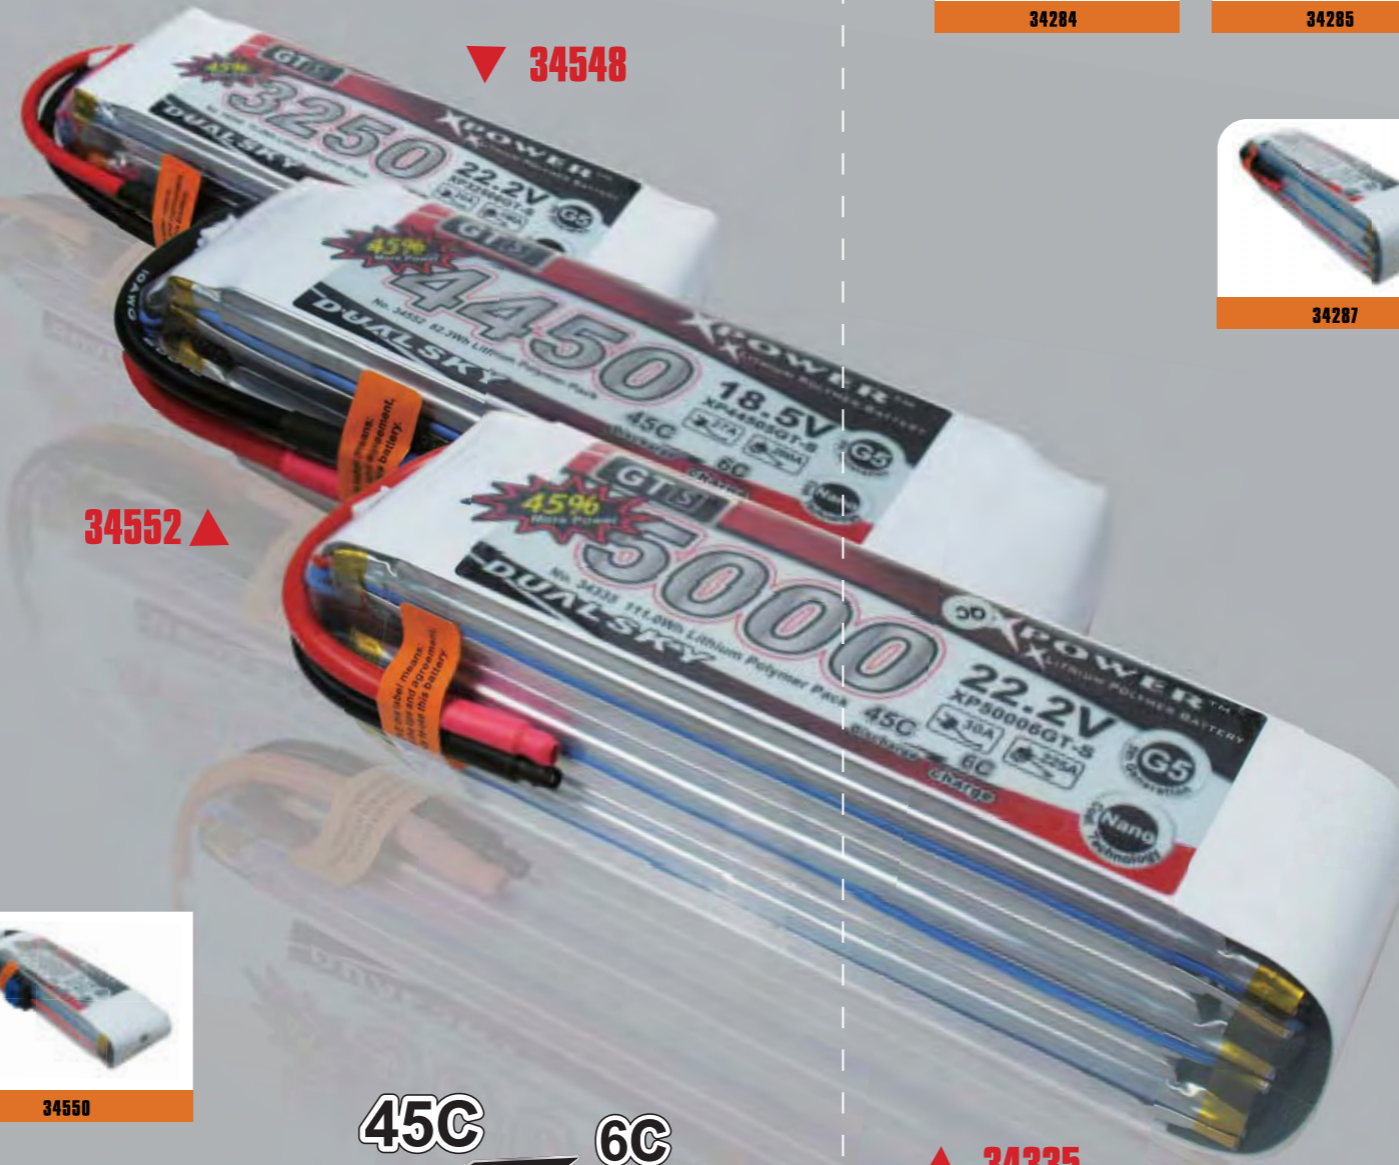

45C Discharge **6C** charge



Item NO.	Name/Description	weight
34546	XP32504GT-S, 3250mAh 4S1P 14.8v, 45C/6C	368.0g
34547	XP32505GT-S, 3250mAh 5S1P 18.5v, 45C/6C	462.5g
34548	XP32506GT-S, 3250mAh 6S1P 22.2v, 45C/6C	544.5g
34448	XP37002GT-S, 3700mAh 2S1P 7.4v, 45C/6C	224.5g
34449	XP37003GT-S, 3700mAh 3S1P 11.1v, 45C/6C	331.0g
34450	XP37004GT-S, 3700mAh 4S1P 14.8v, 45C/6C	430.0g
34451	XP37005GT-S, 3700mAh 5S1P 18.5v, 45C/6C	535.0g
34452	XP37006GT-S, 3700mAh 6S1P 22.2v, 45C/6C	636.0g
34549	XP44502GT-S, 4450mAh 2S1P 7.4v, 45C/6C	560.5g
34550	XP44503GT-S, 4450mAh 3S1P 11.1v, 45C/6C	386.0g
34551	XP44504GT-S, 4450mAh 4S1P 14.8v, 45C/6C	491.0g
34552	XP44505GT-S, 4450mAh 5S1P 18.5v, 45C/6C	617.0g
34553	XP44506GT-S, 4450mAh 6S1P 22.2v, 45C/6C	722.0g
34284	XP50002GT-S, 5000mAh 2S1P 7.4v, 45C/6C	273g
34285	XP50003GT-S, 5000mAh 3S1P 11.1v, 45C/6C	406g
34286	XP50004GT-S, 5000mAh 4S1P 14.8v, 45C/6C	527g
34287	XP50005GT-S, 5000mAh 5S1P 18.5v, 45C/6C	662g
34335	XP50006GT-S, 5000mAh 6S1P 22.2v, 45C/6C	785g
34554	XP60002GT-S, 6000mAh 2S1P 7.4v, 35C/6C	294g
34555	XP60003GT-S, 6000mAh 3S1P 11.1v, 35C/6C	441g
34556	XP60004GT-S, 6000mAh 4S1P 14.8v, 35C/6C	588g
34557	XP60005GT-S, 6000mAh 5S1P 18.5v, 35C/6C	735g
34558	XP60006GT-S, 6000mAh 6S1P 22.2v, 35C/6C	882g



G5 XPOWER HED SERIES -- HIGH ENERGY DENSITY LIPO PACKS FOR GIANT MODELS


G5 Xpower HED 高能量密度轻型电池组

Features:

- Dualsky 5th Generation Xpower battery technology.
- Laminated structure, Nano-Coating Technology, Ultra-Low-IR.
- The key material is imported from Japan.
- Industry most stringent single cell capacity, voltage, resistance and discharge curve(competition level) matching process.
- Provide standard shape and long configuration combination modes for different airframes.

特点:

- Dualsky第五代Xpower电池技术。
- 叠片结构，采用纳米涂层技术，超低内阻。
- 日本进口关键材料。
- 业界最严格的单体容量，电压，内阻甚至放电曲线（竞赛级）配对工序。
- 提供标准型和长条形两种组合方式，适应不同机体。
- 按照严苛的外销品质生产。

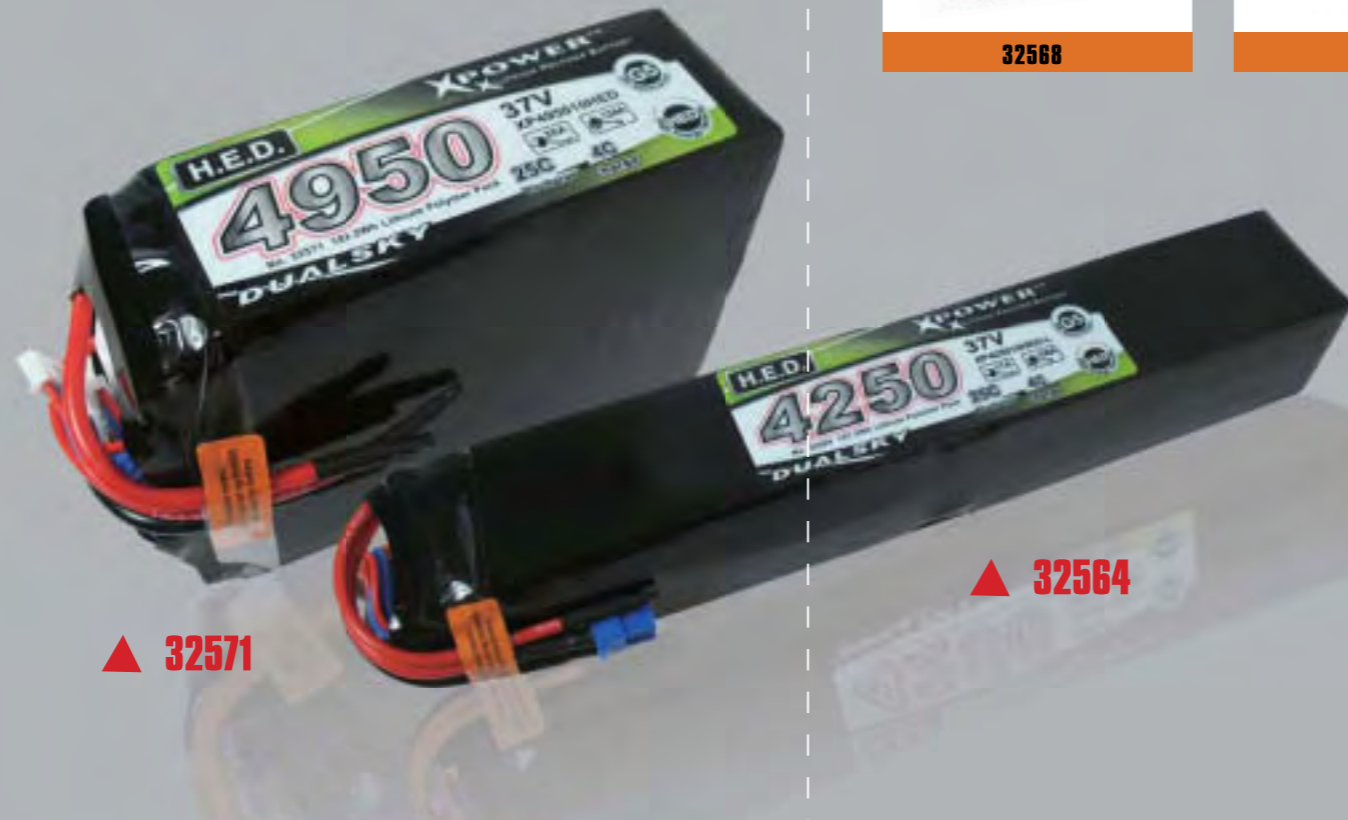

▲ 32571

▲ 32564



32568



32569



32570



32571



32559



32560



32561



32562



32564



32565



32566



32567

Item NO.	Name/Description	weight
32727	XP42504HED, 4250mAh 4S1P 14.8V, 25C/4C New	418g
32559	XP42505HED, 4250mAh 5S1P 18.5V, 25C/4C	520g
32560	XP42506HED, 4250mAh 6S1P 22.2V, 25C/4C	621g
32561	XP42508HED, 4250mAh 8S1P 29.6V, 25C/4C	820g
32562	XP42508HED-L, 4250mAh 8S1P 29.6V, 25C/4C. Long configuration	830g
32563	XP425010HED, 4250mAh 10S1P 37V, 25C/4C	1025g
32564	XP425010HED-L, 4250mAh 10S1P 37V, 25C/4C. Long configuration	1035g
32565	XP425012HED, 4250mAh 12S1P 44.4V, 25C/4C	1210g
32566	XP425012HED-L, 4250mAh 12S1P 44.4V, 25C/4C. Long configuration	1230g
32728	XP49504HED, 4950mAh 4S1P 14.8V, 25C/4C New	468g
32567	XP49505HED, 4950mAh 5S1P 18.5V, 25C/4C	595g
32568	XP49506HED, 4950mAh 6S1P 22.2V, 25C/4C	710g
32569	XP49508HED, 4950mAh 8S1P 29.6V, 25C/4C	932g
32570	XP49508HED-L, 4950mAh 8S1P 29.6V, 25C/4C. Long configuration	940g
32571	XP495010HED, 4950mAh 10S1P 37V, 25C/4C	1165g
32572	XP495010HED-L, 4950mAh 10S1P 37V, 25C/4C. Long configuration	1175g
32573	XP495012HED, 4950mAh 12S1P 44.4V, 25C/4C	1400g
32574	XP495012HED-L, 4950mAh 12S1P 44.4V, 25C/4C. Long configuration	1420g
32729	XP62504HED, 6250mAh 4S1P 14.8V, 25C/4C New	561g
32575	XP62505HED, 6250mAh 5S1P 18.5V, 25C/4C	707g
32576	XP62506HED, 6250mAh 6S1P 22.2V, 25C/4C	831g
32577	XP62508HED, 6250mAh 8S1P 29.6V, 25C/4C	1100g
32578	XP62508HED-L, 6250mAh 8S1P 29.6V, 25C/4C. Long configuration	1100g
32579	XP625010HED, 6250mAh 10S1P 37V, 25C/4C	1370g
32580	XP625010HED-L, 6250mAh 10S1P 37V, 25C/4C. Long configuration	1370g
32581	XP625012HED, 6250mAh 12S1P 44.4V, 25C/4C	1642g
32582	XP625012HED-L, 6250mAh 12S1P 44.4V, 25C/4C. Long configuration	1642g



XPOWER EX SERIES LIPO BATTERY PACKS(30C/5C) NEW

Xpower EX - 具备惊人5C快充能力！新品

Item NO.	Name/Description	Weight
35485	XP04002EX, 7.4V, 400mAh, 2S1P, 5C charge.	30g
35486	XP04003EX, 11.1V, 400mAh, 3S1P, 5C charge.	43
35487	XP08002EX, 7.4V, 800mAh, 2S1P, 5C charge.	48
35488	XP08003EX, 11.1V, 800mAh, 3S1P, 5C charge	72
35489	XP10002EX, 7.4V, 1000mAh, 2S1P, 5C charge	65
35490	XP10003EX, 11.1V, 1000mAh, 3S1P, 5C charge	93
35491	XP13002EX, 7.4V, 1300mAh, 2S1P, 5C charge	80
35492	XP13003EX, 11.1V, 1300mAh, 3S1P, 5C charge	113.5
35493	XP17002EX, 7.4V, 1700mAh, 2S1P, 5C charge	102.5
35494	XP17003EX, 11.1V, 1700mAh, 3S1P, 5C charge	146.5
35495	XP17004EX, 14.8V, 1700mAh, 4S1P, 5C charge	190.5
35496	XP21002EX, 7.4V, 2100mAh, 2S1P, 5C charge	122.5
35497	XP21003EX, 11.1V, 2100mAh, 3S1P, 5C charge	176.5
35498	XP21004EX, 14.8V, 2100mAh, 4S1P, 5C charge	230.5
35499	XP23002EX, 7.4V, 2300mAh, 2S1P, 5C charge	145.5
35500	XP23003EX, 11.1V, 2300mAh, 3S1P, 5C charge	209.5
35501	XP23004EX, 14.8V, 2300mAh, 4S1P, 5C charge	270
35502	XP28002EX, 7.4V, 2800mAh, 2S1P, 5C charge	171
35503	XP28003EX, 11.1V, 2800mAh, 3S1P, 5C charge	245
35504	XP28004EX, 14.8V, 2800mAh, 4S1P, 5C charge	321
35505	XP28005EX, 18.5V, 2800mAh, 5S1P, 5C charge	390
35506	XP28006EX, 22.2V, 2800mAh, 6S1P, 5C charge	470.5
35623	XP36002EX, 7.4V, 3600mAh, 2S1P, 5C charge	212
35624	XP36003EX, 11.1V, 3600mAh, 3S1P, 5C charge	311
35625	XP36004EX, 14.8V, 3600mAh, 4S1P, 5C charge	399
35626	XP36005EX, 18.5V, 3600mAh, 5S1P, 5C charge	495
35627	XP36006EX, 22.2V, 3600mAh, 6S1P, 5C charge	578
35507	XP40002EX, 7.4V, 4000mAh, 2S1P, 5C charge	234.5
35508	XP40003EX, 11.1V, 4000mAh, 3S1P, 5C charge	351
35509	XP40004EX, 14.8V, 4000mAh, 4S1P, 5C charge	447.5
35510	XP40005EX, 18.5V, 4000mAh, 5S1P, 5C charge	559.5
35511	XP40006EX, 22.2V, 4000mAh, 6S1P, 5C charge	643



▲ 35486

▲ 35487

▲ 35488

▲ 35489



XPOWER ES LIPO PACKS (LOWER PRICE, FAVORABLE PERFORMANCE) NEW

Xpower ES 系列 - 更低的价格享受锂电动力 新品

Item NO.	Name/Description	weight
32461	XP01101ES, 3.7V 110mAh, 1S, 20C	3g
32631	XP01501ES, 3.7V 150mAh, 1S, 20C	4g
32632	XP01502ES, 7.4V 150mAh, 2S1P, 20C	10g
32633	XP01503ES, 11.1V 150mAh, 3S1P, 20C	14.5g
32743	XP02201ES, 3.7V 220mAh, 1S, 25C	7g
32737	XP02202ES, 7.4V 220mAh, 2S1P, 25C	16g
32738	XP02501ES, 3.7V 250mAh, 1S, 20C	7.5g
32463	XP02502ES, 7.4V 250mAh, 2S1P, 20C	18g
32464	XP02503ES, 11.1V 250mAh, 3S1P, 20C	26g
32739	XP03001ES, 3.7V 300mAh, 1S, 25C	8g
32740	XP03002ES, 7.4V 300mAh, 2S1P, 25C	18g
32741	XP05201ES, 3.7V 520mAh, 1S, 20C	12.5g
32742	XP05202ES, 7.4V 520mAh, 2S1P, 20C	25g
32465	XP08002ES, 7.4V 800mAh, 2S1P, 20C	42.5g
32466	XP08003ES, 11.1V 800mAh, 3S1P, 20C	61.5g
32467	XP13002ES, 7.4V 1300mAh, 2S1P, 20C	73g
32468	XP13003ES, 11.1V 1300mAh, 3S1P, 20C	109g
32469	XP22002ES, 7.4V 2200mAh, 2S1P, 20C	119g
32470	XP22003ES, 11.1V 2200mAh, 3S1P, 20C	176g
32471	XP32002ES, 7.4V 3200mAh, 2S1P, 20C	178g
32472	XP32003ES, 11.1V 3200mAh, 3S1P, 20C	262g


▼ 32463



32470 ▲


▲ 32472

30481 ▶

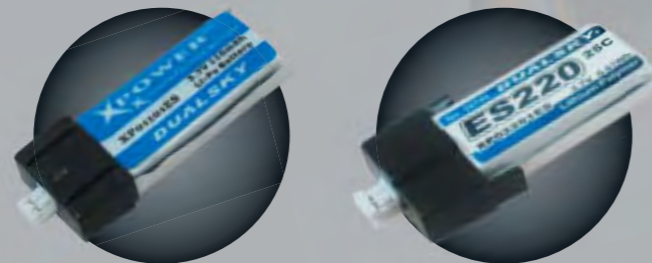


▲ 32461

▲ 32743

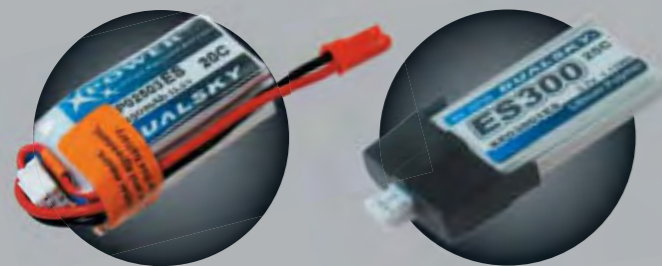

▲ 32464

▲ 32739

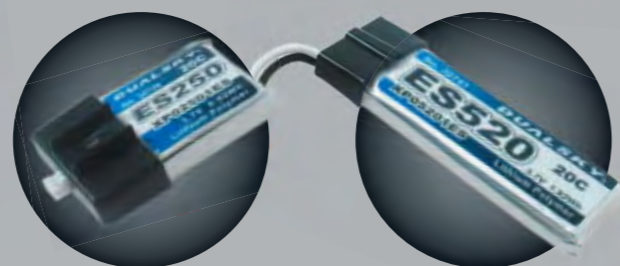

▲ 32738

▲ 32741



▲ 32465



▲ 32466



▲ 32467



▲ 32468



▲ 32469



▲ 32471



30305



30304



30306



30307



30308



30730




30731

BATTERY ACCESSORIES

电池配件

Item NO.	Name/Description
30305	Battery Patch(S), 50 x 30mm, 5PCS per bag
30304	Battery Patch(M), 70 x 30mm, 5PCS per bag
30306	Battery Strap(S), L=208mm, 5PCS per bag
30307	Battery Strap(M), L=263mm, 5PCS per bag
30308	Battery Strap(L), L=364mm, 5PCS per bag
30730	BattFastener 280mm (2pcs)
30731	BattFastener 380mm (2pcs)
30481	DLS300, Dualsky Lipo Sack (Size 300mm)

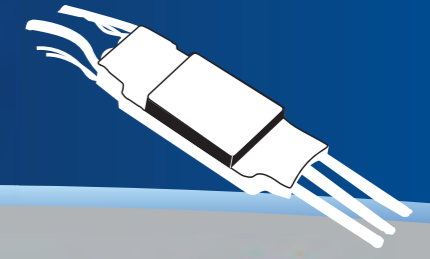

BATTERY ACCESSORIES

电池配件

Item NO.	Name/Description
30520	NEW LiPoMate (Black / White), 6 cell voltage meter and balancer



▲ 30520

45209

XCONTROLLER BA BRUSHLESS & SENSORLESS ESCs V2 NEW!


Xcontroller V2版 无刷变频速度控制器 新品

Item NO.	Name/Description	weight
45203	XC0610BA V2, ESC 6A, 2-3s LiPo, for plane & heli	5.5g
45204	XC1010BA V2, ESC 10A, 2-3s LiPo, for plane & heli	7.5g
45081	XC1210BA V2, ESC 12A, 2-3s LiPo, for plane & heli	12g
45082	XC1812BA V2, ESC 18A, 2-4s LiPo, for plane & heli	18g
45083	XC2512BA V2, ESC 25A, 2-4s LiPo, for plane & heli	22g
45084	XC3012BA V2, ESC 30A, 2-4s LiPo, for plane & heli	22g
45211	XC4018BA V2, ESC 40A, 2-6s LiPo, for plane & heli	32g
45207	XC6018BA V2, ESC 60A, 2-6s LiPo, for plane & heli	63g
45209	XC8018BA V2, ESC 80A, 2-6s LiPo, for plane & heli	71g
45201	XC9036HV V2, 90amps, 5-12s LiPo, OPTO for F3A	140g
45200	ProgCARD V2, for Xcontrollers BA V2	11g
45525	USB LINK, for Xcontroller BA V2	
45316	XC0610-Circle, for XM2812RTR	5g
45315	RevCARD, for XC0610-Circle	

▼ 45209



▲ 45201

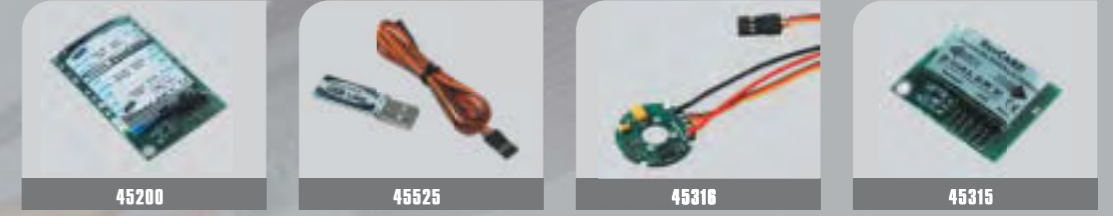

MULTI-FUNCTION CHARGE SYSTEMS


Dualsky充电系统

Item NO.	Name/Description
43341	N61e, multi-function charger, 6S Lipo, 10A max. Integrated Balancer
43521	2s-6s EH Balancing adapter kit for N61e
43522	Universal Balancing adapter for N61e (Default)
43384	Thermal sensor
43518	Power Supply 30A
40109	Multi Charge Connector

43341 ▼



▲ 43518

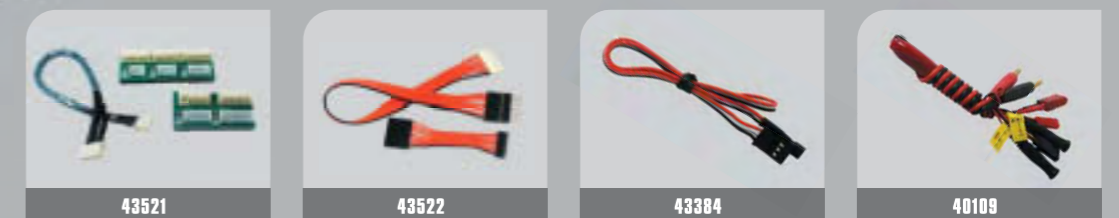

DUALSKY CONNECTOR. HEAVY DUTY.

Dualsky 新型低电阻插头

Item NO.	Name/Description
40519	DC3 SET (1 pair + shrink tube)



专利号: 1448857
Chinese patent protection



DUALSKY BULLETS. LOWER RESISTANCE.

Dualsky “子弹头” 新型低电阻金插

Item NO.	Name/Description
40476	DB2 SET (3 pairs)
40477	DB3 SET (3 pairs)
40478	DB4 SET (3 pairs)



POWER SUPPLY SYSTEMS FOR TX & RX

接收机及发射机供电系统

Item NO.	Name/Description
46622	VR-8LG New 8 amps Linear regulator w/ new F/S flag switch
46726	F/S switch (Flag), Fail safe, flag style, for gaint gasoline models



Item NO.	Name/Description
46087	VR-3(UBEC), up to 6S Li-xx input
46288	VR-5L, 5 amps linear regulator
46289	VR-8L, 8 amps linear regulator
46725	F/S switch, replacement for regulators
46190	RXB15002, For receiver, 1500mah 7.4v
46310	TXB25003-FU, For Futaba FF9 w/cell balancers
46290	TXB25003-JR, For JR w/cell balancers

PCM, BALANCER & CHARGER SYSTEMS

电池充电, 保护及平衡系统

Item NO.	Name/Description
43065	PCM2S, Saver for 2 cells
43066	PCM3S, Balancer for 3 cells
43067	PCM4S, Balancer for 4 cells
43068	PCMPRO, Balancer for 2s, 3s and 4s



GOLD CONNECTORS

传统金插

Item NO.	Name/Description
40319	2.0MM GC (per pair in bulk)
40103	2.0MM GC SET(3 Pairs)
40320	3.5MM GC (per pair in bulk)
40104	3.5MM GC SET(3 Pairs)
40321	4.0MM GC (per pair in bulk)
40105	4.0MM GC SET(3 Pairs)



SILICON WIRES

优质硅胶线

Item NO.	Name/Description
40110	20AWG silicon wire, red x 1m, black x 1m
40111	18AWG silicon wire, red x 1m, black x 1m
40112	16AWG silicon wire, red x 1m, black x 1m
40113	14AWG silicon wire, red x 1m, black x 1m
40114	12AWG silicon wire, red x 1m, black x 1m
40736	10AWG silicon wire, red x 1m, black x 1m



40110



40111



40112




40113



40114



40736

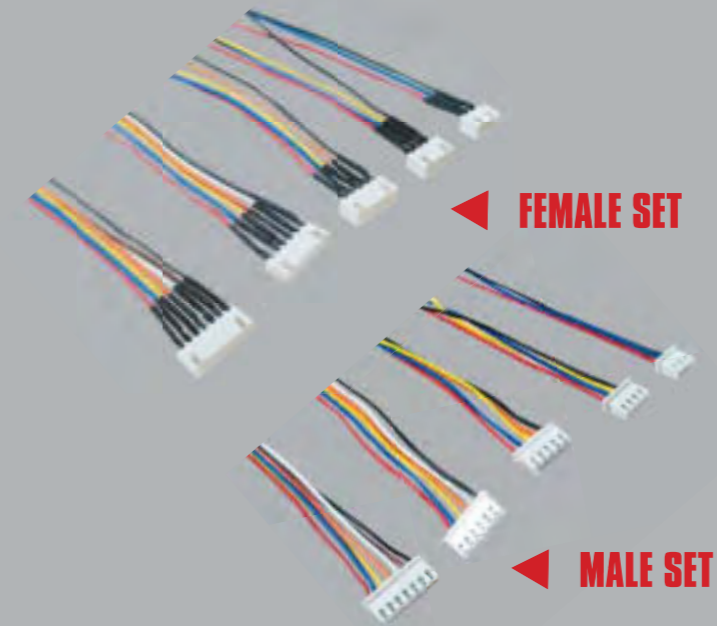

Item NO.	Name/Description
40093	3 PIN MALE SET (2 PCS)
40094	3 PIN FEMALE SET (2 PCS)
40095	4 PIN MALE SET (2 PCS)
40096	4 PIN FEMALE SET (2 PCS)
40097	5 PIN MALE SET (2 PCS)
40098	5 PIN FEMALE SET (2 PCS)
40099	6 PIN MALE SET (2 PCS)
40100	6 PIN FEMALE SET (2 PCS)
40101	7 PIN MALE SET (2 PCS)
40102	7 PIN FEMALE SET (2 PCS)
40311	ULT PLUG, bulk
40106	ULT PLUG SET(3 Pairs)
40313	MIC PLUG
40107	MIC PLUG SET(3 Pairs)
40314	JST PLUG, pair in bulk
40108	JST PLUG SET(3 Pairs)

DUALSKY APPARELS

Dualsky品牌服饰

Item NO.	Name/Description
20512	Polo Shirt, with dualsky logos, Navy, Size = M
20513	Polo Shirt, Navy, Size = L
20514	Polo Shirt, Navy, Size = XL
20515	Polo Shirt, Navy, Size = XXL
20516	Dualsky Cap



DUALSKY LOGO DECAL

Dualsky贴纸

Item NO.	Name/Description
20621	Dualsky Logo Decal



RC MODEL AIRCRAFT KIT

无线电遥控模型飞机套材



Breeze Pro (type A - Blue)
Wingspan: 780mm,
Length: 850mm,
Weight: 130g - 150g,
Depron indoor acrobatic model

23423



Breeze Pro New (type B - Orange)
Depron indoor acrobatic model

23423



Breeze Pro New (type C - Green)
Depron indoor acrobatic model

23423



Yak 54 pro
Wingspan: 800mm,
Length: 823mm,
Weight: 130g - 150g,
Depron indoor acrobatic model

23523



Extra 330sc pro
Wingspan: 800mm,
Length: 855mm,
Weight: 130g - 150g,
Depron indoor acrobatic model

23524



Breeze Mini New (type A)
Wingspan: 620mm,
Length: 658mm,
Weight: 70g - 85g,
EPP indoor acrobatic model

23628



Breeze Mini New (type B - Blue)
EPP indoor acrobatic model

23629



Extra 260 pro New
Wingspan: 820mm,
Length: 856mm,
Weight: 130g - 150g,
Depron indoor acrobatic model

23709



Yak 55 pro New
Wingspan: 880mm,
Length: 920mm,
Weight: 145g - 165g,
Depron indoor acrobatic model

23710



Breeze ES
Wingspan: 900mm,
Length: 950mm,
Weight: 280g - 350g,
Depron park fly airplane kit

23483



23710 ▲

DUALSKY MICRO SERVOS NEW!

Dualsky 小型舵机 新品

Item NO.	Name/Description
20592	DS3101 New, net weight 3.7g. Digital micro servo for precision mini models
20473	DS3001, 5g coreless micro servo with top BB
20482	DS3002, 10g micro STD servo for park models



▲ 20482



▲ 20592



▲ 20473